



391182 (E9ECMH4Q05)

4-Hot Plate (4 kW each) electric Boiling Top - marine

Main Features

- IPx4 water protection.
- The special design of the control knob system guarantees against water infiltration.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 4kW cast-iron plates are hermtically sealed to the one-piece top. Hot plates with a power of 4kW for each plate.
- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800mm
206138	Support for bridge type installation, 1000mm
206139	Support for bridge type installation, 1200mm
206140	Support for bridge type installation, 1400mm
206141	Support for bridge type installation, 1600mm
Burner grids, plates, supports	
206056	Pair of cast iron plate bars for electric cooking top
Chimney upstands	
206304	Chimney upstand, 800mm
206400	Chimney grid net, 400mm (700XP/900)




PNC Code	Description
Handrails	
206308	Back handrail 800 mm
206309	Back handrail 1200 mm
216044	Side handrail-right/left hand (900XP)
216047	Frontal handrail, 800mm
216049	Frontal handrail, 1200mm
216050	Frontal handrail, 1600mm
216185	Large handrail - portioning shelf, 400mm
216186	Large handrail - portioning shelf, 800mm
Installation solutions	
206086	Junction sealing kit
Panels	
216278	2 side covering panels for top appliances
Water taps	
206289	Water column with swivel arm (water column extension not included)
206290	Water column extension for 900 line



Technical specifications

Electric	
Supply voltage:	400 V/3 ph/50/60 Hz
Total Watts:	16 kW
Key Information:	
Net weight:	85 kg
Shipping weight:	86 kg
Shipping height:	640 mm
Shipping width:	1020 mm
Shipping depth:	860 mm
Shipping volume:	0.56 m³
Certification group:	N9CEI
Front Plates Power:	4 - 4 kW
Back Plates Power:	4 - 4 kW
Front Plates dimensions:	300x300 300x300
Back Plates dimensions:	300x300 300x300

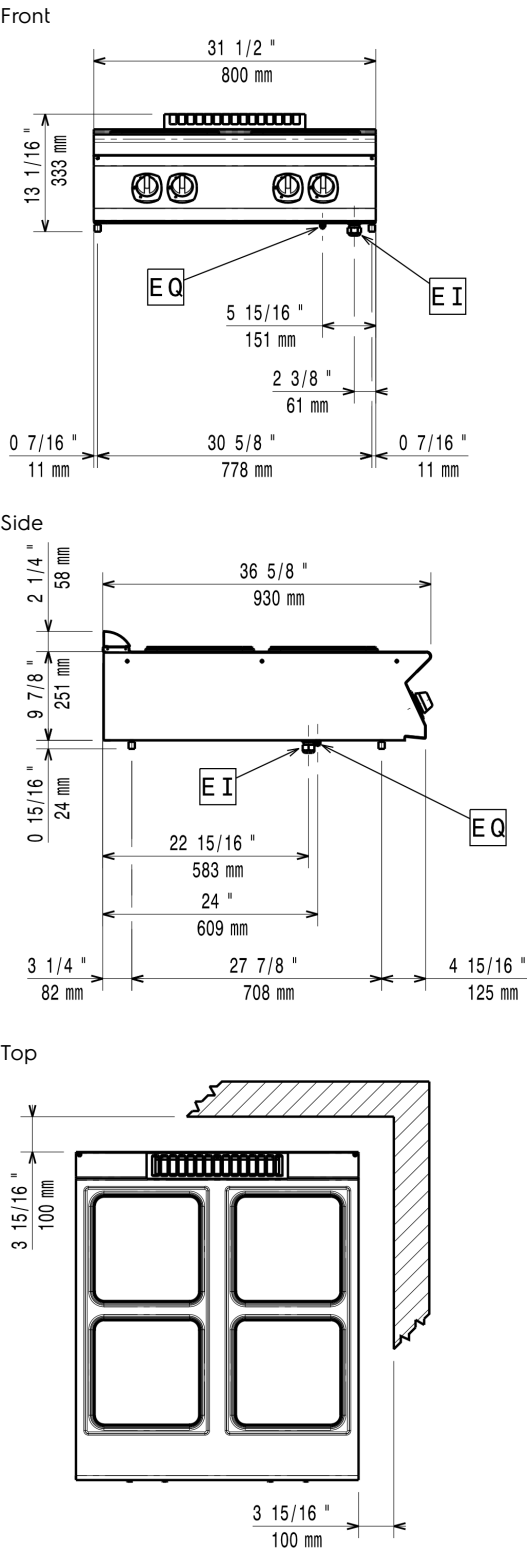

EI = Electrical inlet (power)
EQ = Equipotential screw



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.