

**589909 (MC3ACOCOOM)**

Closed Base, Marine feet, 300mm

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Closed base compartment to be installed below modular top units.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.



Optional Accessories

PNC Code	Description
Kicking strips	
912629	Stainless steel front kicking strip, 300mm width
912657	Stainless steel side kicking strip left and right, freestanding, 900mm width
912660	Stainless steel side kicking strips left and right, against the wall, 900mm width
912663	Stainless steel side kicking strip left and right, back-to-back, 1810mm width
Panels	
912512	Stainless steel side panel, 900x700mm, freestanding
913101	Stainless steel panel, 900x700mm, against wall, left side
913105	Stainless steel panel, 900x700mm, against wall, right side
913162	Back panel, 300x450mm, for bases one-side operated
913222	Stainless steel side panel, left, H=700
913223	Stainless steel side panel, right, H=700
913260	Side reinforced panel only in combination with side shelf, for freestanding units
913267	Side reinforced panel only in combination with side shelf, for against the wall installations, left
913269	Side reinforced panel only in combination with side shelf, for against the wall installations, right
913275	Side reinforced panel only in combination with side shelf, for back-to-back installations, left
913276	Side reinforced panel only in combination with side shelf, for back-to-back installation, right
913672	Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)
913688	Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)
Other accessories	
912934	Stainless steel plinth, against wall, 300mm width
912953	Stainless steel plinth, freestanding, 300mm width

Recommended Detergents

PNC Code	Description
OS2292	C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt bottles (trigger incl.)
OS2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
OS2882	S02 Degreaser. A highly concentrated detergent specifically for cleaning and removing grease from appliances and surfaces. Active up to a maximum of 50°C Complete with spray bottle. Pack of 6x750ml bottles
OS2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
OS2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
OS3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity




Technical specifications


Key Information:

External dimensions, Width:	300 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	450 mm
Net weight:	9.5 kg


Front

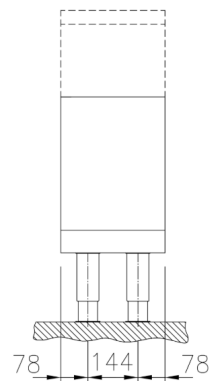

Side

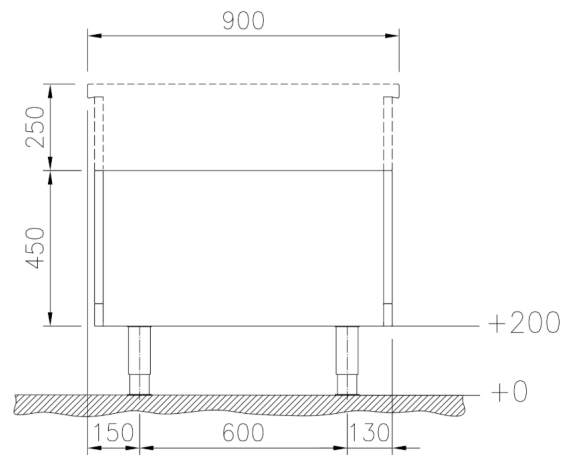

Top

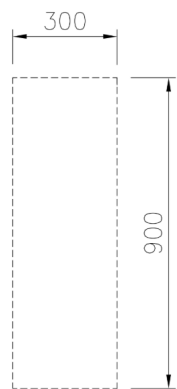

Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.