



589911 (MCDEEAHIDM)

Electric Chargrill on base, H3, one-side operated - Marine

Main Features

- Stainless steel high splash guards on the rear and sides of cooking surface.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal-covered knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Burners are protected by 1.4509 (AISI 441) stainless steel deflective trays avoiding flare-ups and providing even heat distribution.
- Full-length grease collection drawer with filling indicator, to collect residual cooking grease, and handle to facilitate manipulations.

Construction

- IPx4 water protection.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Included Accessories

PNC Code	Description	Quantity
913712	Scraper for HP electric Chargrill - Marine	1



Optional Accessories

PNC Code	Description
Cleaning solutions	
206436	Scraper for HP electric grill
Connection and endrail kits	
912502	Connecting rail kit, 900mm
913111	Endrail kit, flush-fitting, left
913112	Endrail kit, flush-fitting, right
913202	Endrail kit (12.5mm) for thermaline 90 units, left
913203	Endrail kit (12.5mm) for thermaline 90 units, right
913227	T-connection rail for back-to-back installations without backsplash (to be ordered as S-code)
913251	Endrail kit, (12.5mm), for back-to-back installation, left
913252	Endrail kit, (12.5mm), for back-to-back installation, right
913255	Endrail kit, flush-fitting, for back-to-back installation, left
913256	Endrail kit, flush-fitting, for back-to-back installation, right
Filters	
913665	Filter W=800mm
Panels	
912512	Stainless steel side panel, 900x700mm, freestanding
913222	Stainless steel side panel, left, H=700
913223	Stainless steel side panel, right, H=700
913260	Side reinforced panel only in combination with side shelf, for freestanding units
913275	Side reinforced panel only in combination with side shelf, for back-to-back installations, left
913276	Side reinforced panel only in combination with side shelf, for back-to-back installation, right
913672	Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)
913688	Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)
Shelves	
912526	Portioning shelf, 800mm width
912556	Portioning shelf, 800mm width
912581	Folding shelf, 300x900mm
912582	Folding shelf, 400x900mm
912589	Fixed side shelf, 200x900mm
912590	Fixed side shelf, 300x900mm
912591	Fixed side shelf, 400x900mm



Recommended Detergents

PNC Code	Description
OS2292	C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.)
OS2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
OS2882	S02 Degreaser. A highly concentrated detergent specifically for cleaning and removing grease from appliances and surfaces. Active up to a maximum of 50°C Complete with spray bottle. Pack of 6x750ml bottles
OS2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
OS2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
OS3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity



Technical specifications

Electric

Supply voltage:	440 V/3 ph/50/60 Hz
Total Watts:	10.8 kW


Key Information:

External dimensions, Width:	800 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	700 mm
Net weight:	150 kg
Configuration:	On Base;One-Side Operated


Sustainability

Energy consumption, Min/Max:	0 - 0 m³/h
------------------------------	------------


Front

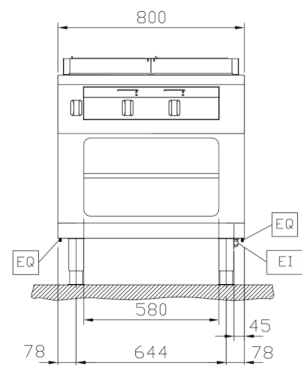

Side

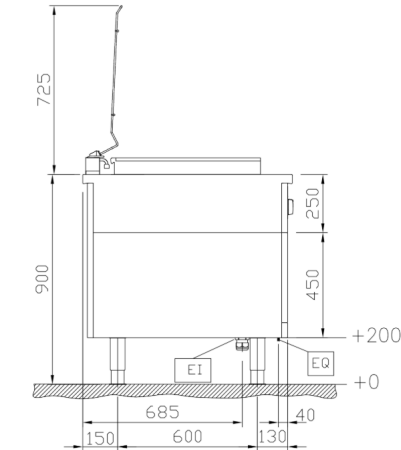

Top

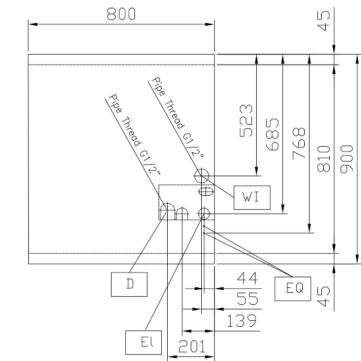

- D = Drain
- EI = Electrical inlet (power)
- EQ = Equipotential screw



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.