

**725192 (TC671DH5M)**

1-door Thawing Cabinet, 10 stainless steel grids, 670lt, 0+10°C, AISI 304, R290 - Marine (50Hz)

Main Features

- Fully customisable parameters to suit even the most demanding needs.
- Temperature display shows real temperature evolution allowing for frequent and brief checks during the thawing-preservation process.
- The electronic control switches automatically from thawing into preservation to avoid bacteria proliferation.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- Even airflow ensured by back air conveyor and ensuring consistent results on products to be thawed in a single load.
- Powerful fan to ensure a quick and uniform thawing process.
- The rack support can be removed without tools to speed up cleaning operations and they are dishwasher safe.
- Fully HACCP compliant thanks to the temperature control, visualisation and alarm management.
- 3 factory-preset and 1 free program to cope with loads from approx 20kg to 80kg. All programs are customisable in time, temperatures and thaw/ preservation split of phases.
- 10 AISI 304 grids GN 2/1 supplied as standard to maximise internal space.
- Tropicalized unit

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Fully pressed bottom plate and rounded corners for easier cleaning.
- Mainly construction in A304 stainless steel for everlasting operation in all working environment.
- Integrated security lock.





A focus on sustainability

Sustainability

- CFC, HCFC, HFC-free insulation.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Certifications & Recognitions



International system for mutual acceptance of test reports and certificates concerning the safety of electrical and electronic components, equipment, and products.



Product assessed by the manufacturer and deemed to meet EU safety, health, and environmental protection requirements.



Product placed on the Great Britain market and complies with UK regulations and standards.



Find out more:
[ISO Certificates](#)
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/07/13

2/5

Technical specifications

Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Compressor power:	1/3 hp

Key Information:

N° of doors:	1 Full
External dimensions, Width:	710 mm
External dimensions, Depth:	835 mm
External dimensions, Height:	2036 mm
Internal Dimensions, Width:	560 mm
Internal Dimensions, Depth:	707 mm
Internal Dimensions, Height:	1460 mm
Net weight:	149 kg
Type of external material:	Stainless Steel AISI 304
Type of internal material:	Stainless Steel AISI 304
External side panels:	Stainless Steel AISI 304
External top panels:	Stainless Steel AISI 304
External door material:	Stainless Steel AISI 304
Internal panels material:	Stainless Steel AISI 304
Back panel:	

Refrigeration Data

Control type:	Digital
Refrigeration power at evaporation temperature:	-10 °C
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C

Sustainability


Noise level:	54 dBA
Refrigerant type:	R290

ISO Certificates


ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001
Type reference/certification group:	VIMTTNH

Installation drawings


Front

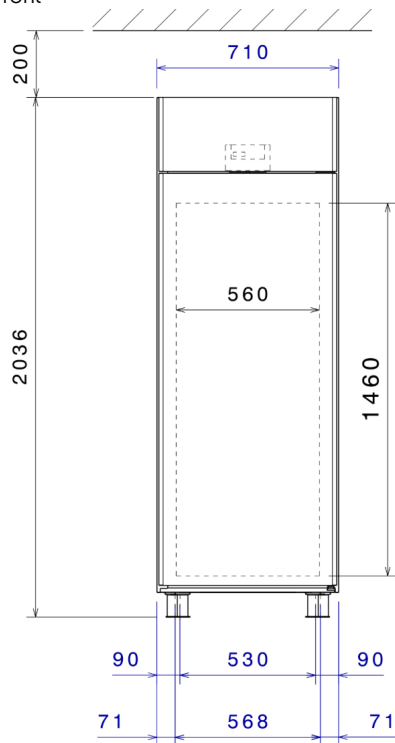


Side

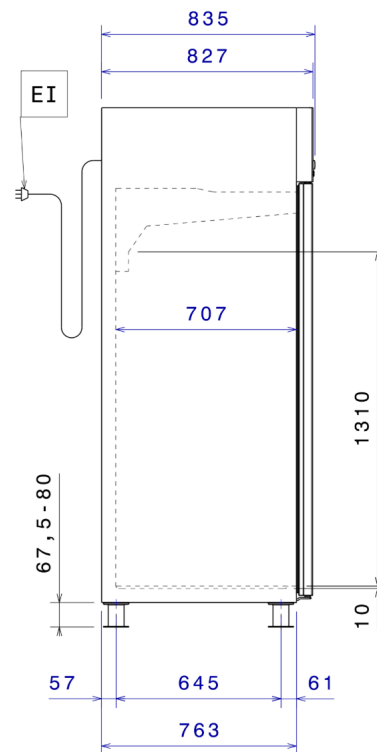

Top

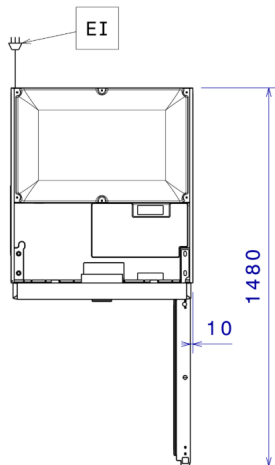

Distances

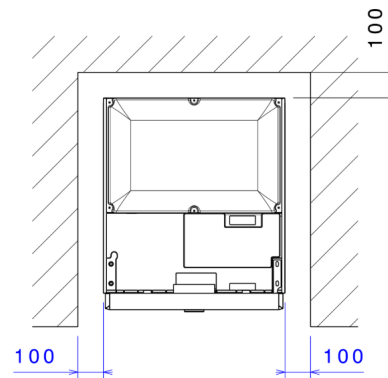

D = Drain
RO = Refrigerant Outlet

EI = Electrical inlet (power)
RI = Refrigerant Inlet

Accessories

Included Accessories

PNC Code	Description	Quantity
881016	2/1GN aisi 304 stainless steel grid	10
881202	Internal back air baffle/conveyor for 10 grids Thawing Cabinet	1
881206	Collecting tray in AISI 304 stainless steel for Thawing Cabinet with internal back air baffle/conveyor	1
881287	Shelf support with 10 positions for Thawing Cabinet - US	1

Optional Accessories

PNC Code	Description
Air baffles	
881201	Internal back air baffle/conveyor for 15 grids Thawing Cabinet
Containers, trays and grids	
880248	Spacer for 670 lt and 1430 lt refrigerated cabinets
881016	2/1GN aisi 304 stainless steel grid
881203	Collecting tray in AISI 304 stainless steel for Thawing Cabinet
881286	Shelf support with 15 positions for Thawing Cabinet - US

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity