

**725193 (TC671DH6M)**

1-door Thawing Cabinet, 10 stainless steel grids, 670lt, 0+10°C, AISI 304, R290 - Marine (60Hz)

Main Features

- Fully customisable parameters to suit even the most demanding needs.
- Temperature display shows real temperature evolution allowing for frequent and brief checks during the thawing-preservation process.
- The electronic control switches automatically from thawing into preservation to avoid bacteria proliferation.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- Even airflow ensured by back air conveyor and ensuring consistent results on products to be thawed in a single load.
- Powerful fan to ensure a quick and uniform thawing process.
- The rack support can be removed without tools to speed up cleaning operations and they are dishwasher safe.
- Fully HACCP compliant thanks to the temperature control, visualisation and alarm management.
- 3 factory-preset and 1 free program to cope with loads from approx 20kg to 80kg. All programs are customisable in time, temperatures and thaw/ preservation split of phases.
- 10 AISI 304 grids GN 2/1 supplied as standard to maximise internal space.
- Tropicalized unit

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Fully pressed bottom plate and rounded corners for easier cleaning.
- Mainly construction in A304 stainless steel for everlasting operation in all working environment.
- Integrated security lock.





A focus on sustainability

Sustainability

- CFC, HCFC, HFC-free insulation.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Certifications & Recognitions



International system for mutual acceptance of test reports and certificates concerning the safety of electrical and electronic components, equipment, and products.



Find out more:
[ISO Certificates](#)
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/07/13

2/5

Technical specifications

Electric

Supply voltage:	220-230 V/1 ph/60 Hz
Compressor power:	1/4 hp

Key Information:

N° of doors:	1 Full
External dimensions, Width:	710 mm
External dimensions, Depth:	835 mm
External dimensions, Height:	2036 mm
Internal Dimensions, Width:	560 mm
Internal Dimensions, Depth:	707 mm
Internal Dimensions, Height:	1460 mm
Net weight:	149 kg
Type of external material:	Stainless Steel AISI 304
Type of internal material:	Stainless Steel AISI 304
External side panels:	Stainless Steel AISI 304
External top panels:	Stainless Steel AISI 304
External door material:	Stainless Steel AISI 304
Internal panels material:	Stainless Steel AISI 304
Back panel:	

Refrigeration Data

Control type:	Digital
Refrigeration power at evaporation temperature:	-10 °C
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C

Sustainability


Noise level:	54 dBA
Refrigerant type:	R290

ISO Certificates


ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001
Type reference/certification group:	VIMTTN6H

Installation drawings


Front

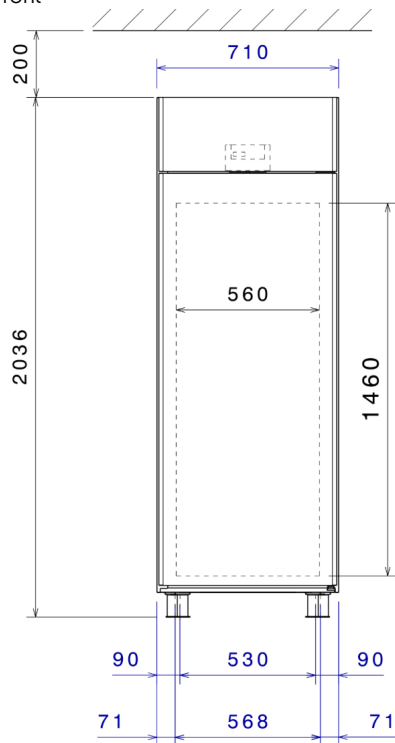


Side

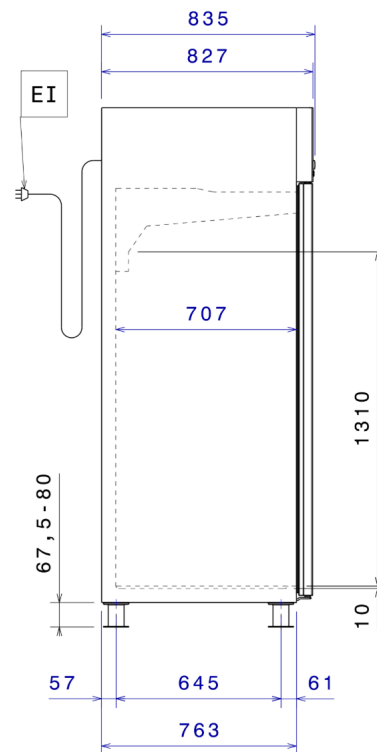

Top

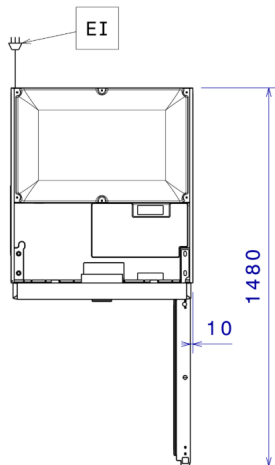

Distances

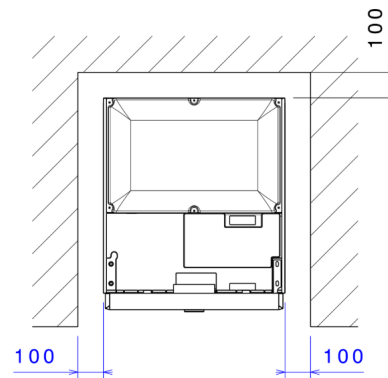

EI = Electrical inlet (power)

RI = Refrigerant Inlet

RO = Refrigerant Outlet

Accessories

Included Accessories

PNC Code	Description	Quantity
881016	2/1GN aisi 304 stainless steel grid	10
881202	Internal back air baffle/conveyor for 10 grids Thawing Cabinet	1
881206	Collecting tray in AISI 304 stainless steel for Thawing Cabinet with internal back air baffle/conveyor	1
881287	Shelf support with 10 positions for Thawing Cabinet - US	1

Optional Accessories

PNC Code	Description
Air baffles	
881201	Internal back air baffle/conveyor for 15 grids Thawing Cabinet
Containers, trays and grids	
880248	Spacer for 670 lt and 1430 lt refrigerated cabinets
881016	2/1GN aisi 304 stainless steel grid
881203	Collecting tray in AISI 304 stainless steel for Thawing Cabinet
881286	Shelf support with 15 positions for Thawing Cabinet - US

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity